



JEMA-SD SERIES LED EMERGENCY BATTERY PACK

CONSTANT POWER SELF-DIAGNOSTIC EMERGENCY BATTERY PACK



FEATURES


- UL Listed to UL924 and tested to CSA C22.2 NO.141 Field or factory installation
- High voltage output
- Low energy consumption on CEC compliance.
- Constant output power
- Self-testing
- Battery: Over temperature protection

SPECIFICATIONS

Input Voltage (Universal) 120-277VAC, 50/60Hz
 Input Current 100mA Max
 Input Power (120V/277V) 7 Watts (max)
 Output Voltage DC25-230VDC
 Output Power 8,15,20,30 Watts
 Surge Protection Line Neutral 3KV
 Recharge Time 24 Hour Recharge
 Discharge Time >1.5Hours
 Weight 2.66 lbs.
 Ambient Temperature 0° to 55°C
 Approval UL Listed for factory and field installation
 Warranty 5 Years

Model Number	Output Power	Output Voltage	Battery
JEMA-SD-8W-50	8W	25-50VDC	Lithium Ion
JEMA-SD-15W-50	15W		
JEMA-SD-20W-50	20W		
JEMA-SD-30W-50	30W		
JEMA-SD-8W-80	8W	51-80VDC	
JEMA-SD-15W-80	15W		
JEMA-SD-20W-80	20W		
JEMA-SD-30W-80	30W		
JEMA-SD-8W-155	8W	81-155VDC	
JEMA-SD-15W-155	15W		
JEMA-SD-20W-155	20W		
JEMA-SD-30W-155	30W		
JEMA-SD-8W-230	8W	156-230VDC	
JEMA-SD-15W-230	15W		
JEMA-SD-20W-230	20W		
JEMA-SD-30W-230	30W		

DIMENSIONS

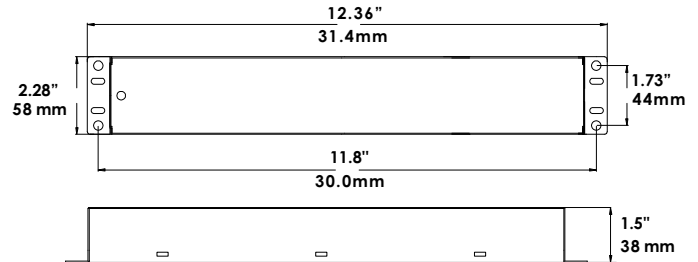

WIRING DIAGRAM

